




FACTS

A successful installation of LivePicture GO, LivePicture, LivePanel and LivePanel PACK is dependent on the availability of light at the location. Not all locations have sufficient light while plant growth is dependent on the so called daylight spectrum. LiveSpectrum is a series of light fittings specially developed to simulate and emulate natural daylight. These can be surface-mounted or recess-fitted.

These LED fixtures have full spectrum colour rendering and are available in various light intensities. The LiveSpectrum luminaires (lighting units) are suitable for mounting on or fixing into ceilings and are equipped with energy-saving long-life LEDs. The LED lights are also dimmable to allow the user to select suitable brightness levels for all LivePicture and LivePanel products.


- Plants need full-spectrum light
- 1000 – 2000 lux
- 10 hours per day
- It may be necessary to make a lighting calculation

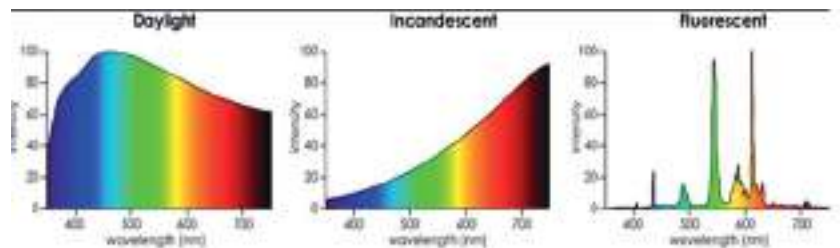

LIVESPECTRUM MOBILIGHT FEATURES

- Bulb colours available from warm to natural white; 2700k, 3000k, 3500k and 4000k
- Excellent replication of natural light temperatures
- Adjustable luminaire with a 3-phase track (surface-mounted)
- 350° horizontally rotatable and vertically 90° adjustable (surface-mounted)
- Easy to attach to ceiling systems (surface-mounted)
- Can be suspended with suspension fitting (surface-mounted)
- Lens and reflector options available to group or spread the light beam
- Luminaires available in white, silver grey and black
- Luminaires can be dimmed (Bluetooth)



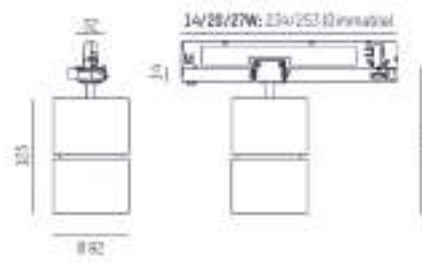

MobiLight Track

Power 14-27W
Lumen Output 1500-2770lm
Colour Fastness CRI90+

Light Beams





Controls



Finished



Bulb Colours

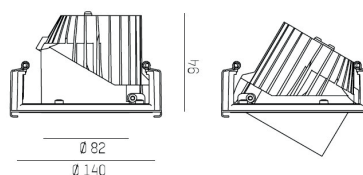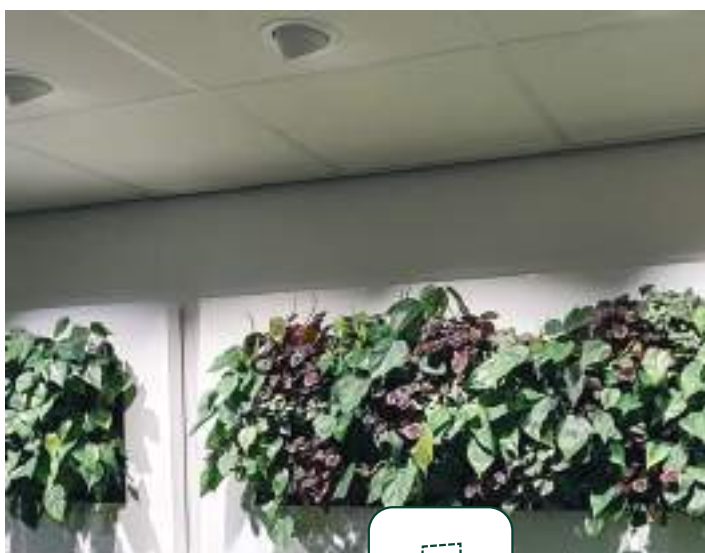

MobiLight R

Power 12-35W
Lumen Output 1500-4100lm
Colour Fastness CRI90+

Light Beams





Finishes




Bulb Colours




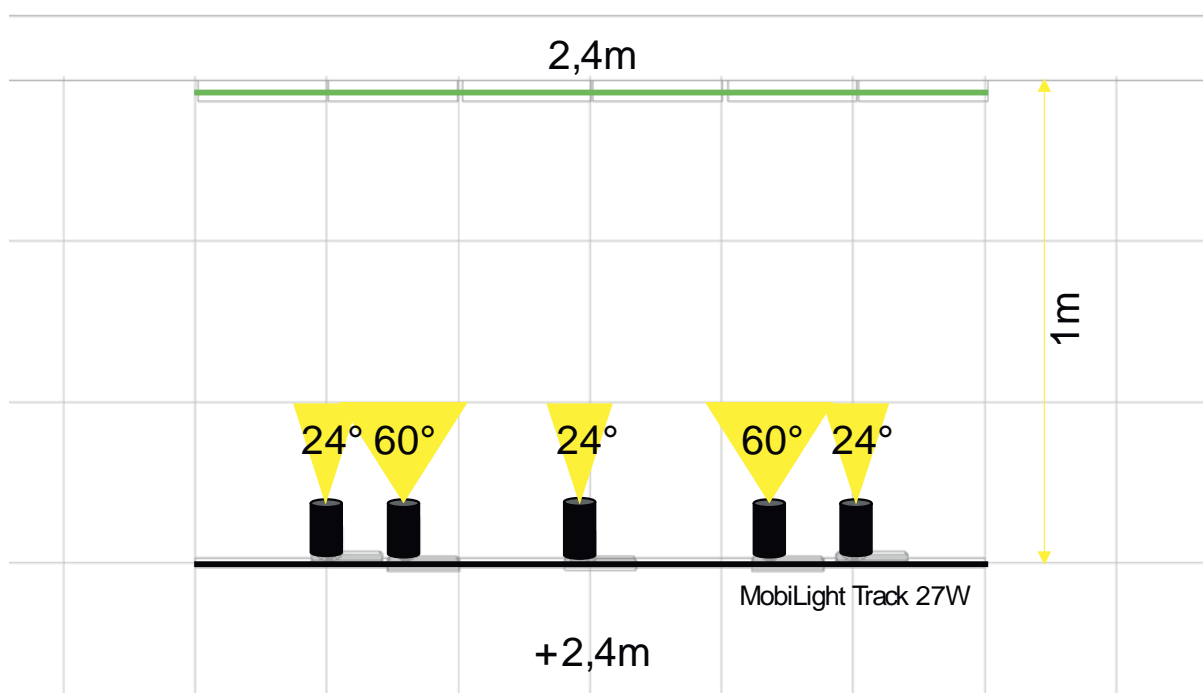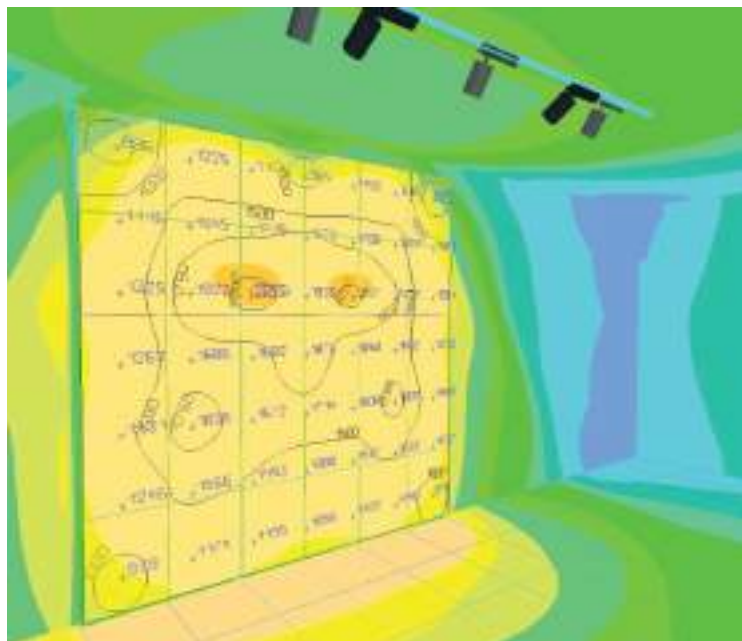


LivePanel Indoor

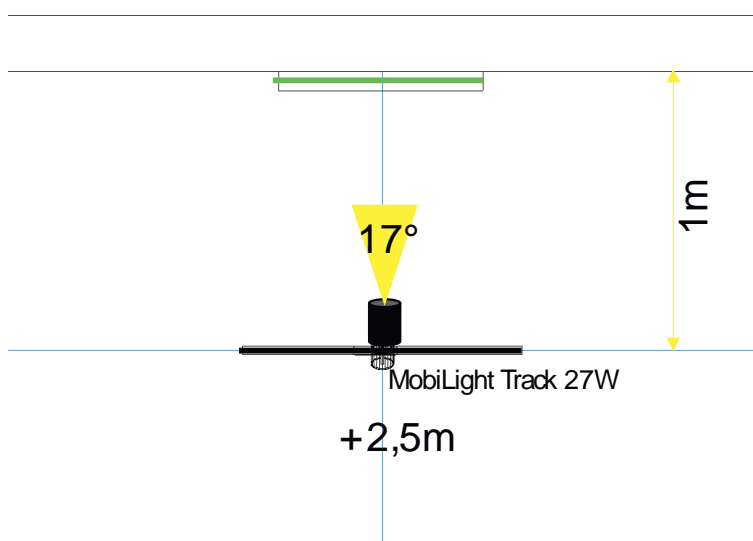


Requirements		Quantity
3-Phase Track white black grey	1m	1
Starter white black grey		1
End Cap white black grey		1
Mounting Block white black grey		2
MobiLight Track 27W	On/Off	1

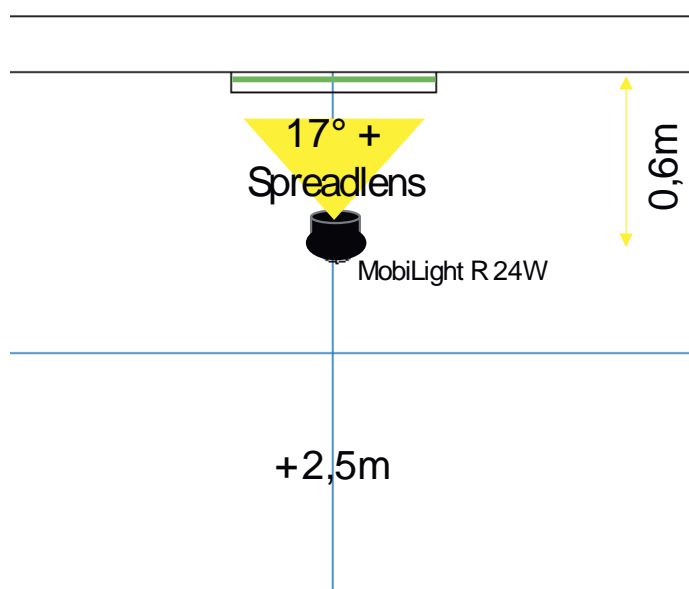

Requirements		Quantity
MobiLight R 24W	Excl. driver	1
Spread Lens		1
Driver	On/off	1

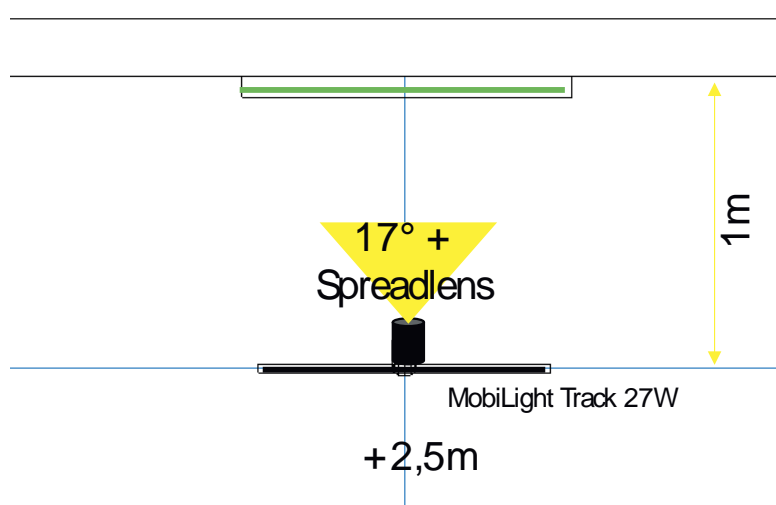


Requirements		Quantity
3-Phase Track white black grey	1m	1
Starter white black grey		1
End Cap white black grey		1
Mounting Block white black grey		2
MobiLight Track 27W	On/Off	1
Spread Lens		1

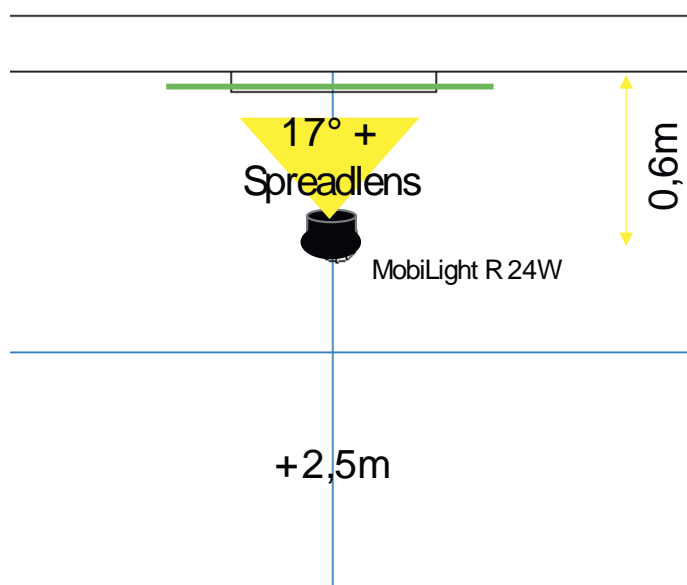


Requirements		Quantity
MobiLight R 24W	Excl. driver	1
Lens Spread		1
Driver	On/off	1




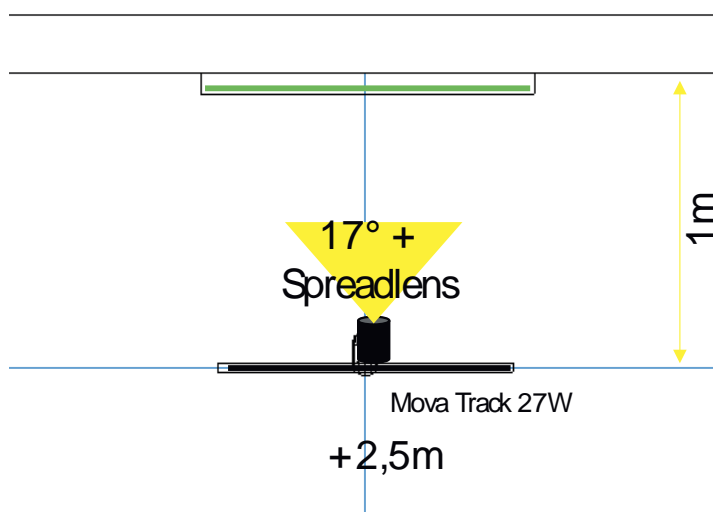


Requirements		Quantity
3-Phase Track white black grey	1m	1
Starter white black grey		1
End Cap white black grey		1
Mounting Block white black grey		2
MobiLight Track 27W	On/Off	1
Spread Lens		1

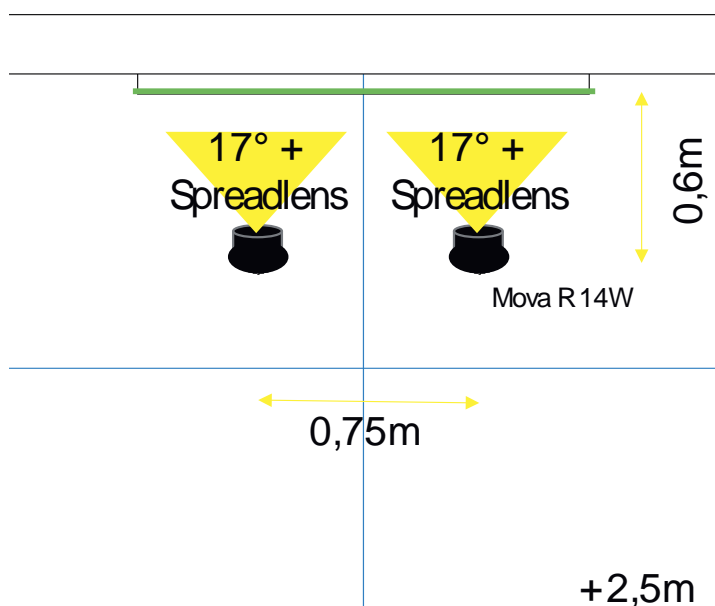


Requirements		Quantity
MobiLight R 14W	Excl. driver	2
Lens Spread		2
Driver	On/off	2

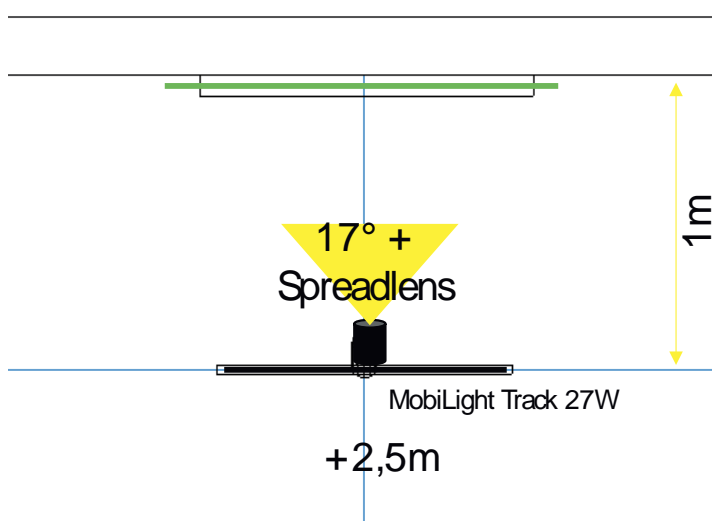



Requirements		Quantity
3-Phase Track white black grey	1m	1
Starter white black grey		1
End Cap white black grey		1
Mounting Block white black grey		2
MobiLight Track 27W	On/Off	1
Spread Lens		1

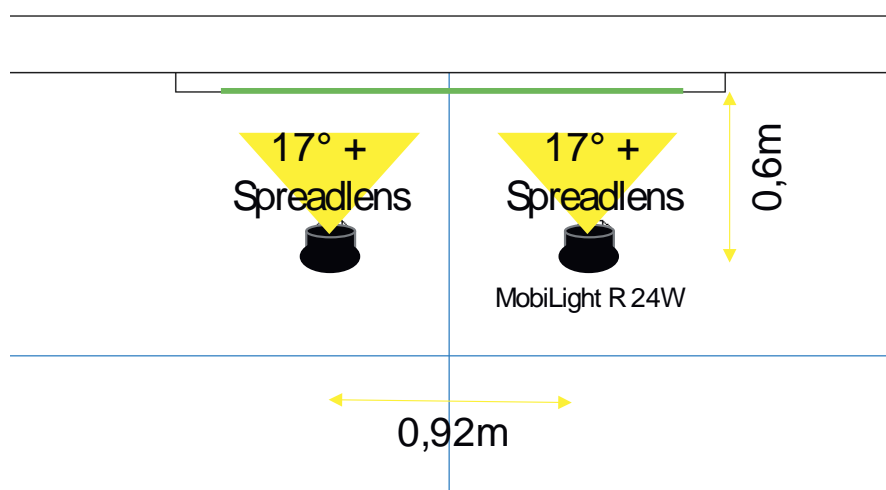

Requirements		Quantity
MobiLight R 24W	Excl. driver	2
Lens Spread		2
Driver	On/off	2

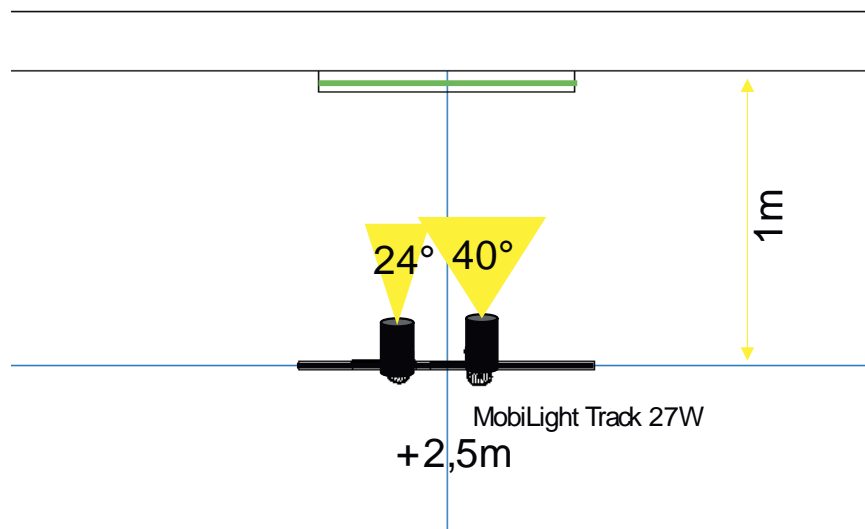


Requirements		Quantity
3-Phase Track white black grey	1m	1
Starter white black grey		1
End Cap white black grey		1
Mounting Block white black grey		2
MobiLight Track 27W24°	On/Off	1
MobiLight Track 27W40°	On/Off	1

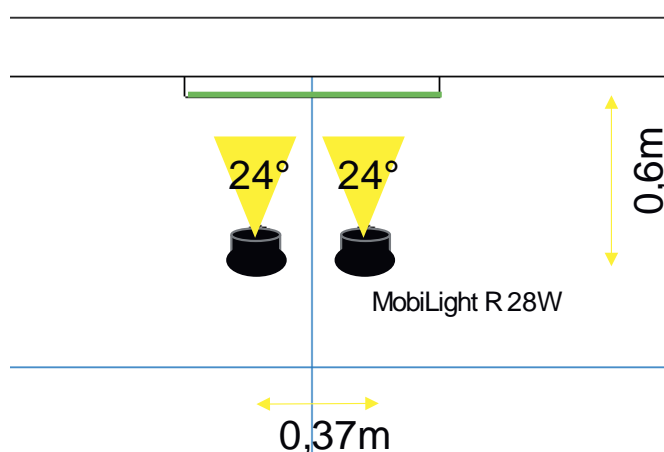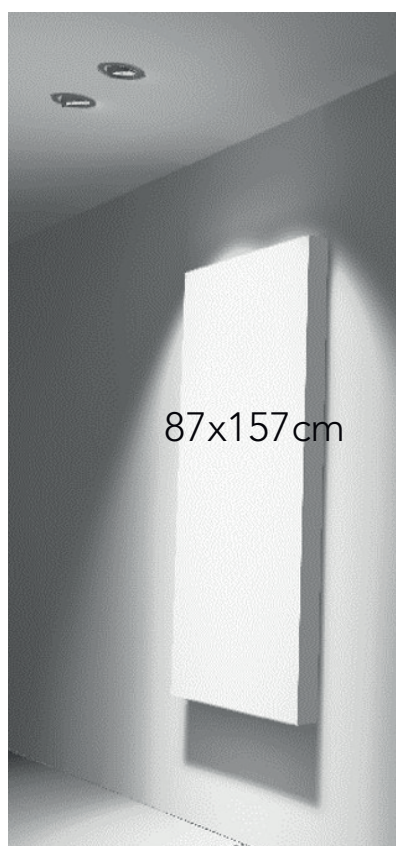



Requirements		Quantity
MobiLight R 28W24°	Excl. driver	2
Driver	On/off	2

LivePanel PACK 2 x 3



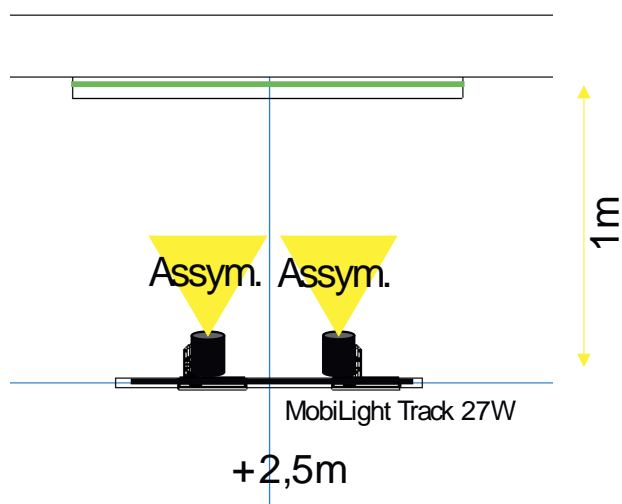


Requirements		Quantity
3-Phase Track white black grey	1m	1
Starter white black grey		1
End Cap white black grey		1
Mounting Block white black grey		2
MobiLight Track 27W assym	On/Off	1

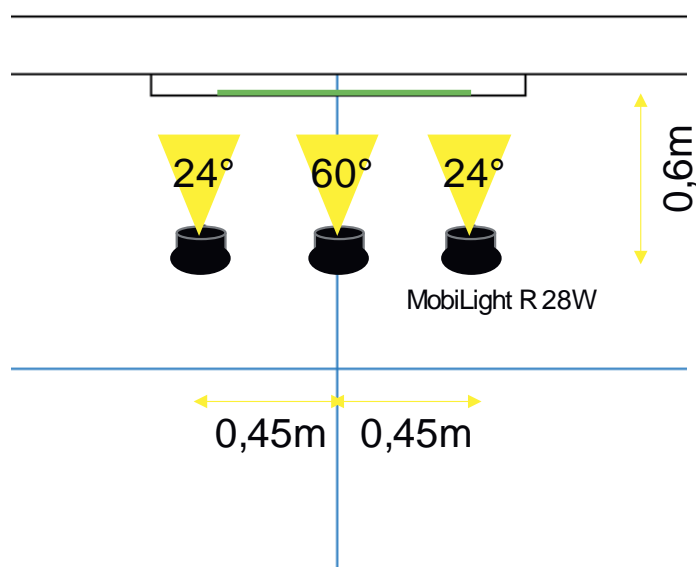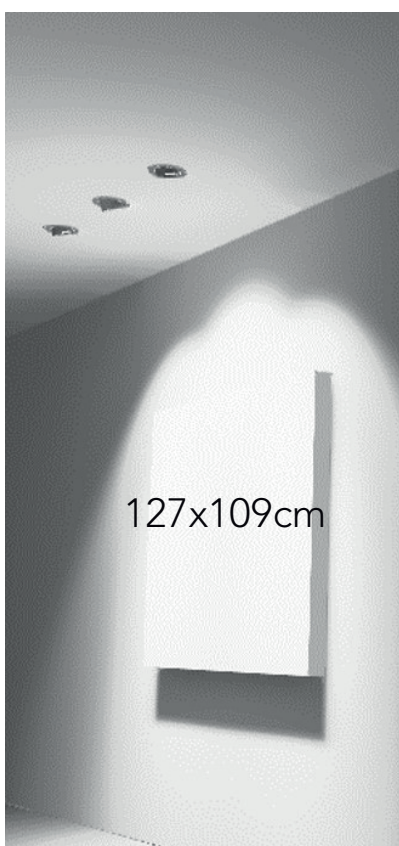


Requirements		Quantity
MobiLight R 28W24°	Excl. driver	2
MobiLight R 28W60°	Excl. driver	1
Driver	On/off	3

LivePanel PACK 3 x 2



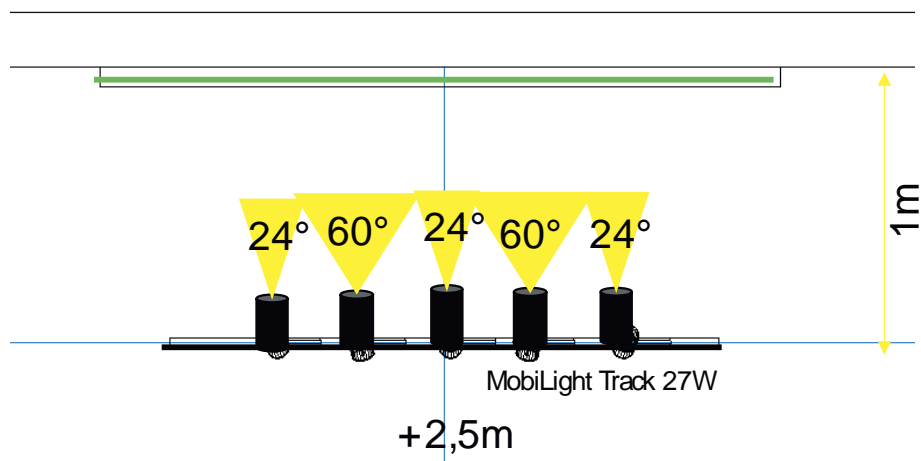


Requirements		Quantity
3-Phase Track white black grey	1m	1
Starter white black grey		1
End Cap white black grey		1
Mounting Block white black grey		3
MobiLight Track 27W24°	On/Off	3
MobiLight Track 27W60°	On/Off	2

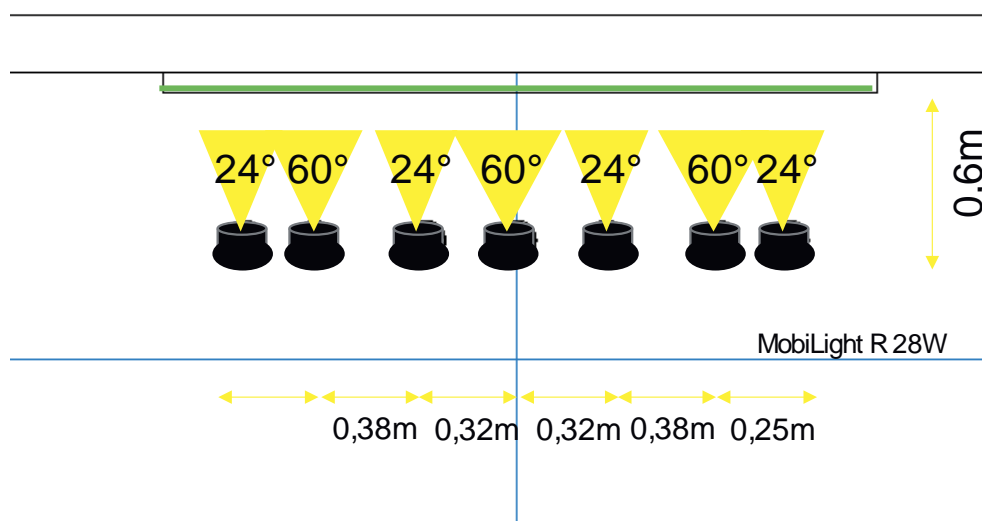





Requirements		Quantity
MobiLight R 28W24°	Excl. driver	4
MobiLight R 28W60°	Excl. driver	3
Driver	On/off	7

LivePanel PACK 6 x 4



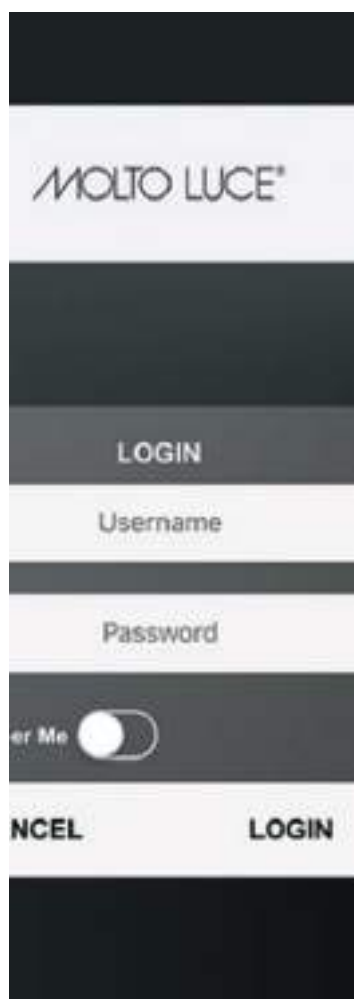

Use the Molto Luce Smart APP to control the lighting system. Whether a single luminaire, group or the entire network, the app allows you to programme timing schedules to suit.

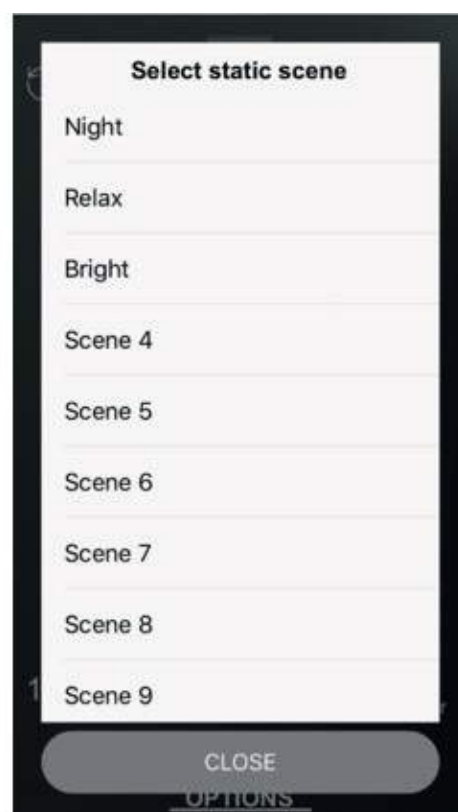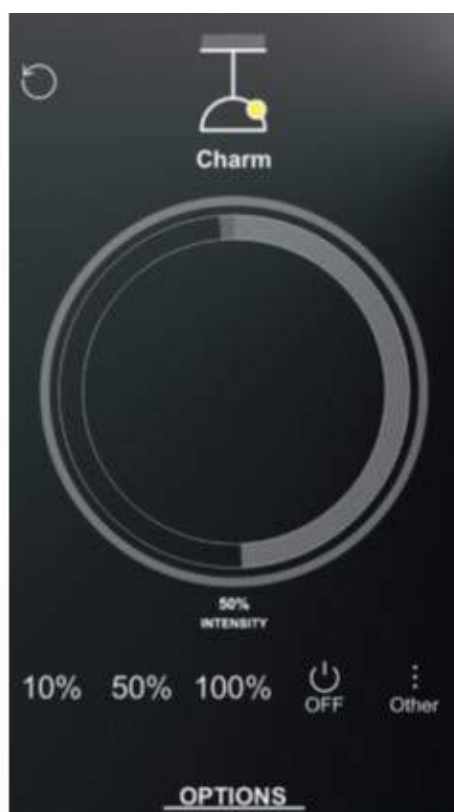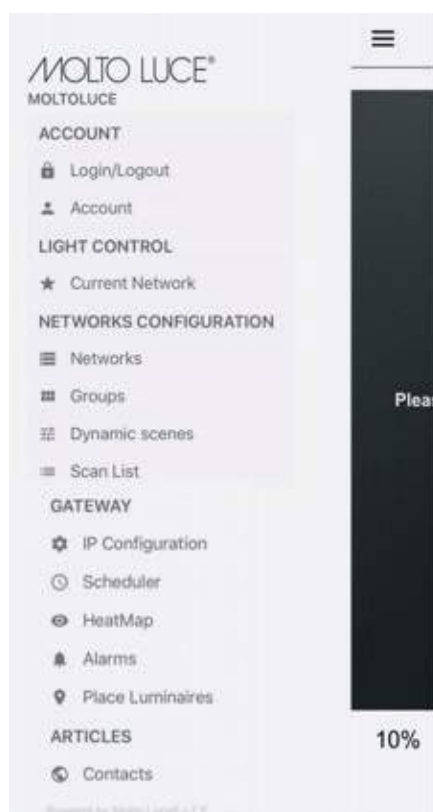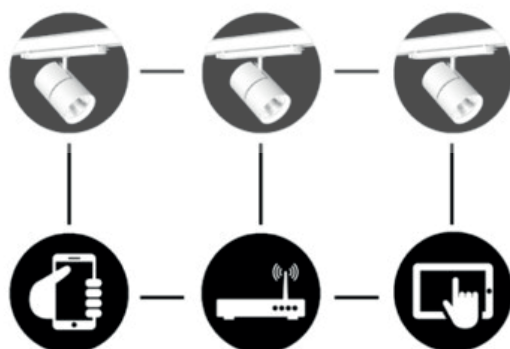



MOBILANE

BUILDING GREEN

Lighting for Vertical Greenery

Your Mobilane Checklist

<input type="checkbox"/>	Project Name	<input type="text"/>
<input type="checkbox"/>	Location	<input type="text"/>
<input type="checkbox"/>	Mobilane Account Manager	<input type="text"/>
<input type="checkbox"/>	Expected delivery date	<input type="text"/>

<input type="checkbox"/>	Living Wall Dimensions (Length x Height)	<input type="text"/>
<input type="checkbox"/>	Ceiling Type e.g. Concrete Wood Suspended Ceiling	<input type="text"/>
<input type="checkbox"/>	Ceiling Height (in cm)	<input type="text"/>
<input type="checkbox"/>	230vac present? (Indicate location in Site Sketch)	<input type="text"/>

Site Sketch:

<input type="checkbox"/>	Type of luminaire (Recessed/Track)	<input type="text"/>
<input type="checkbox"/>	Luminaire finish White Black Grey	<input type="text"/>
<input type="checkbox"/>	Bulb colour 2700 3000 3500 4000K	<input type="text"/>
<input type="checkbox"/>	Control On/Off DALI Bluetooth	<input type="text"/>
<input type="checkbox"/>	Other information:	<input type="text"/>

<input type="checkbox"/>	Amount of Lux (standard 1000lx)	<input type="text"/>
--------------------------	------------------------------------	----------------------

<input type="checkbox"/>	Room function: Meeting room, Entrance etc.	<input type="text"/>
--------------------------	--	----------------------

Choose your lighting options


<input type="checkbox"/>	Recessed or Track	<input type="text"/>	<input type="checkbox"/>	Degree Bundle	<input type="text"/>
<input type="checkbox"/>	Finish White/black/grey	<input type="text"/>	<input type="checkbox"/>	Control On-Off/DALI/Bluetooth	<input type="text"/>
<input type="checkbox"/>	Power	<input type="text"/> W _(attage)	<input type="checkbox"/>	Accessory(s) Spread Lens/Honeycomb	<input type="text"/>
<input type="checkbox"/>	Light colour	<input type="text"/> K _(elvin)			
<input type="checkbox"/>	Quantities	<input type="text"/>			

Choose your track options

<input type="checkbox"/>	Length of Track	<input type="text"/> cm
<input type="checkbox"/>	Finish White/black/grey	<input type="text"/>
<input type="checkbox"/>	Ceiling Mounted or suspended	<input type="text"/>

Site Sketch:

Light Beam Spread



Bulb colours



Finished



Controls



WWW.MOBILANE.CO.UK